

ESTICK LED



- Negro Forja / Black Forge
- Gris forja / Forge Grey
- Marrón Forja / Forge Brown



Descripción / Description

- **Cuerpo** en tubo de acero galvanizado AISI-304 de sección rectangular 200x100mm.
- **Óptica:** compuesta por módulo PCB LED VS Lighting de 16 Leds de alta eficiencia (hasta 137lm/w). Distribución asimétrica vial.
- **Fuente de alimentación:** 220-240V/50-60Hz. Protección sobretensiones 10Kv.
- **Acabado:** Diferentes colores disponibles.
- **Estanqueidad:** IP65/óptica IP66. **Protección:** IK10. **Aislamiento:** CLI.
- **Bajo petición:** diversas soluciones de control y otras temperaturas de color; ambar, 5000K...

- **Body:** AISI-304 galvanized steel tube with rectangular section 200x100mm.
- **Optical:** PCB LED VS Lighting with 16 high efficiency Leds (up to 137lm/w). Street assymetrical distribution.
- **Power Supply:** 220-240V/50-60Hz with electronic ballast. 10 Kv surge protection.
- **Finish:** Different colours available.
- **Sealing:** IP66. **Protection:** IK10. **Electrical class:** CLI.
- **Optional:** Different dimming control solutions and other colour temperatures; amber, 5000k...



Códigos / Codes

Código Code	Modelo Model	Nº Leds Leds nº	Potencia Power	Corriente Current	Tensión Voltage	**Flujo **Flux	Tª de Color Colour Tª	Peso (kg) Weight (kg)	Distribución Distribution
AP-3431	ESTICK-5	12	16W	500mA	220-240V	2400lm	3000K	80,00	Asimétrica Vial Street Asymmetrical
AP-3432			24W	700mA		3500lm			
AP-3433			36W	1050mA		4650lm			
AP-3435			47W	700mA		7000lm			
AP-3441	ESTICK-7	12	16W	500mA	220-240V	2400lm	3000K	120,00	Asimétrica Vial Street Asymmetrical
AP-3442			24W	700mA		3500lm			
AP-3443			36W	1050mA		4650lm			
AP-3445			47W	700mA		7000lm			
AP-3446			72W	1050mA		9300lm			


**Valores a Marzo-2021. ILS-ILUCA mejorará estos valores conforme avance la tecnología.

**Values on March-2021. ILS-ILUCA will improve this values according to the development of the technology.

Accesorios / Accesories


Código Code	Descripción Description
RLD-0101	Driver dimable 1-10V, DALI o programable / 1-10V, DALI or programmable dimmable driver
RLD-0108	Protección contra sobretensiones de hasta 10Kv / Surge protection device up to 10kV

Fotometrías / Photometry

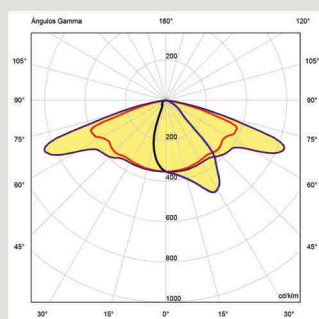

Asimétrica Vial

Dimensiones / Dimmensions

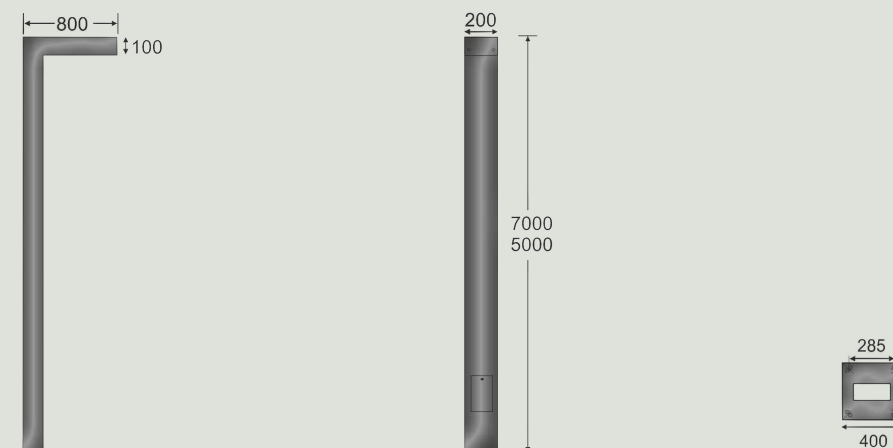

Dimensiones en mm / Dimmensions in mm